

RESISTANCE THERMOMETER

Measuring insert: Fixed

Type: RT-BUI

Sheet No.
3-4 V2

5451-E010721V3.1




Application:

- Measurement of temperatures in closed pipelines and containers with gaseous or liquid media, e.g. air, steam, gas, water or oil.
- Field of application: up to 600°C, max 50bar and media velocities of up to 25 m/sec
- Typically applied in:
 - Processing plants
 - Power plants
 - District heating, energy distribution

Properties:

- Pt100 or Pt1000 resistance thermometer in acc. with IEC 60751
- Mechanical and thermal stress in accordance with DIN 43772
- Process attachment: Welded or adjustable coupling
- Measuring insert: Fixed, short reaction time
- Outer protective sheath: Stainless acid-proof steel
- Modular construction and standard length minimizes the number of spare parts
- Can be delivered with head mounted transmitter
- Marine approved by: DNV.GL, LR, NK, RINA, ABS, and BV
- Approved by: GOST, TCRU on request.

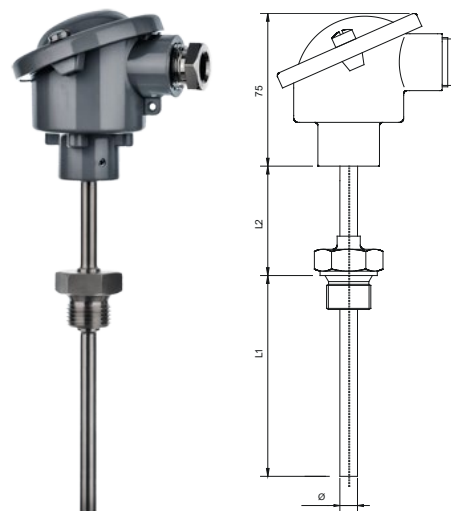

MECHANICAL SPECIFICATIONS

Protective sheath: -----

EN 1.4571 (AISI 316Ti) max. 850°C
Other on request

Sensor diameter Ø [mm]: -----

Ø6 / Ø8 / Ø9 / Ø11 / Ø15
Other on request

Extension length L2 [mm]: -----

None (13 mm) / 50 / 100 / 150
Special

Immersion length L1 [mm]: -----

50 / 100 / 150 / 200 / 250 / 300
Other on request

Process attachment: -----

1/4" BSP welded coupling (max. Ø9mm)
1/2" BSP welded coupling
1/2" NPT welded coupling
3/4" BSP welded coupling
1" BSP welded coupling (min. Ø11mm)
Other on request

Protection head: -----

B (aluminium (Al), enamelled, low cap, IP62)
BH (Al, enamelled, high cap, IP62)
BSB (Al, tilting lid w/screw, low cap, IP65)
BSBH (Al, tilting lid w/screw, high cap, IP65)
BSBH-W (Al, tilting lid, high cap, digital display (excl. tr.), IP65)
CE (Al, enamelled, screw cap, IP68)
BSP (plastic, black, screw cap, IP54)
BRF (stainless steel, screw cap, M20x1,5, IP67)
BRF-EEX (stainless steel, screw cap, M20x1,5, IP67)
B-SRF (sanitary, stainless steel, screw cap, M20x1,5, IP67)
Other on request

Cable gland (pre-mounted): -----

None (standard – cable entry M20x1.5)
Plastic
Nickel plated brass
Stainless acid-proof steel

Please specify cable diameter: -----

ELECTRICAL SPECIFICATIONS

---Plug (pre-mounted In Head):

M12 (for M20)
Harting (specify type)
Other on request
None

---Cable (pre-mounted in Head):

SS (Silicone-Silicone) max. 180°C
SBS (Silicone-Inner Braided-Silicone) max. 180°C
TBT (Teflon-Inner Braided-Teflon) max. 250°C
None

---Cable length [m]:

---Sensor element:

1xPt100
2xPt100
1xPt1000 (only cl. B 1/1 and cl. A)
2xPt1000 (only cl. B 1/1 and cl. A)

---Number of conductors:

2-wire (recommended only for Pt1000)
3-wire
4-wire

---Media temperature max:

+180°C
+250°C
+400°C
+600°C (only cl. B 1/1 Pt100 and Pt1000)

---Tolerance in acc. with IEC 60751:

Type A DIN (i.e. $\pm(0,15+0,002 \times \text{Tactual})$ °C)
Type B 1/1 DIN (i.e. $\pm(0,3+0,005 \times \text{Tactual})$ °C)
Type B 1/3 DIN (i.e. $\pm(0,1+0,0017 \times \text{Tactual})$ °C)
Type B 1/6 DIN (i.e. $\pm(0,05+0,00083 \times \text{Tactual})$ °C)
Type B 1/10 DIN (i.e. $\pm(0,03+0,0005 \times \text{Tactual})$ °C)

Link for further information: [Pt100 Tolerance](#)

RESISTANCE THERMOMETER

Measuring insert: Fixed

Type: RT-BUI

Sheet No.
3-4 V2

5451-E010721V3.1



Calibration:

Temperature calibration are used to verify and certify the sensor to have the correct accuracy. We can do either: "In house" or "Accredited" calibration. Accredited is certified by 3.e part. Normally we do a calibration in 3 points.

Enhanced performance services:


Cold applications (below -50°C) will influence the material and the measurement. CRYO treatment is needed to ensure a correct and working sensor down to -196°C.

A sensor will always drift over time, especially when there are high temperature fluctuations.

With "Ageing treatment" we stabilize the sensor to ensure a minimum drift over time. The benefits are long term stability, more correct measurement and easier planning of calibration periods.

Documentation:

Please order the correct documentation when ordering the sensor.

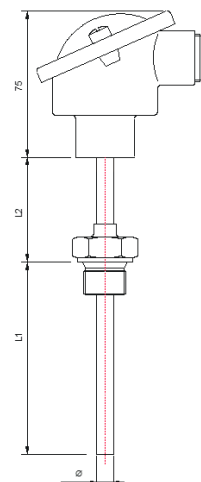

SIGNAL PROCESSING

Ceramic socket mounted in terminal head. -----

Prepared for transmitter w/o ceramic socket. -----
w/long leads

Programmable head mounted transmitter-----

Measuring range min/max: -200/+850°C

Output: 2-wire, 4-20 mA

Min. span: 25°C

Ambient temperature min/max: -40/+85°C

5333A Uninsulated for RTD

5333D EEX Uninsulated for RTD

5331A Galvanic Isolated RTD / TC

5331D EEX Galvanic Isolated RTD / TC

5335A Hart 5 Protocol Standard

5335D Hart 5 Protocol CSA, FM, ATEX, IECEx

5337A Hart 5 & 7 Protocol standard

5337D Hart 5 & 7 Protocol CSA, FM, ATEX, IECEx



Transmitter Type:			
4 mA =	C°	20 mA =	C°

Link to further information:

[Transmitter Overview](#)

[Programmable rail mounted transmitter](#)



CALIBRATION

-----Calibration:

In house (Span -33°C - +700°C)

Accredited – in laboratory (-196°C - +1200°C)

1.	Point	°C
2.	Point	°C
3.	Point	°C

More point on request

Enhanced performance services

-----Cryo treatment.

For temperature sensor under -50°C

-----Ageing:

For long term stability.

Secure minimum drift of sensor accuracy

-----Documentation

Certificate: 3.1 Material

Certificate of origin

Certificate of conformity

Certificate of GOST

-----Marine Certificate

Certificate of DNV.GL

Certificate of BV

Certificate of Rina

Certificate of ClassNK

Certificate of LR

Certificate of ABS

Other on request

THERMOCOUPLE THERMOMETER

Measuring insert: Fixed

Type:
TC-BUI

Sheet No.
3-4 V2.1
5351-E010721V3.1




Application:

- For measuring temperatures in closed pipelines and containers with gaseous or liquid media, e.g. air, steam, gas, water or oil.
- Field of application: up to 1250°C (depending on thermocouple)
- Usually applied in: tile works, refuse disposal plants, processing plants, power plants, district heating, energy distribution

Properties:

- Thermocouple thermometer type K, J, E, N, T in acc. with DIN IEC 60584-1
- Constructed in accordance with DIN 43733
- Measuring insert: Fixed
- Outer protective tube: Heat-proof steel or stainless acid-proof steel
- Modular construction and standard length minimizes the number of spare parts.
- Can be delivered with head mounted transmitter
- Marine approved by: DNV.GL, LR, NK, RINA, ABS, and BV
- Approved by: GOST, TCRU on request.

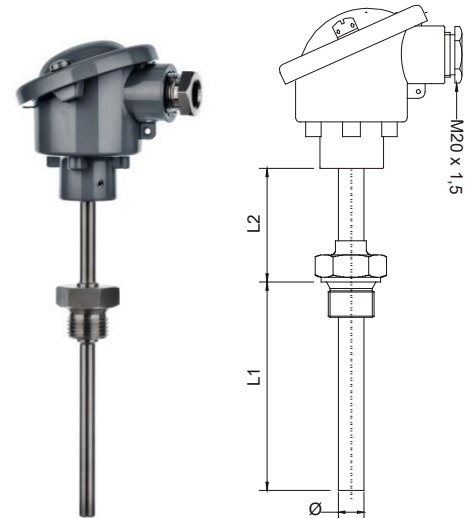

MECHANICAL SPECIFICATIONS

Protective sheath: -----
EN 1.4571 (AISI 316Ti) max. 850°C
Other on request

Sensor diameter Ø [mm]: -----
Ø8 / Ø9 / Ø11 / Ø15
Other on request

Extension length L2 [mm]: -----
50 / 100 / 150
Other on request

Immersion length L1 [mm]: -----
50 / 100 / 150 / 200 / 250 / 300
Other on request

Process attachment: -----
¼" BSP welded coupling
½" BSP welded coupling
¾" BSP welded coupling
Other on request

Protection head: -----
B (aluminum (Al), enameled, low cap, IP62)
BH (Al, enameled, high cap, IP62)
BSB (Al, tilting lid w/screw, low cap, IP65)
BSBH (Al, tilting lid w/screw, high cap, IP65)
BSBH-W (Al, tilting lid w/screw, high cap, digital display (excl. tr.), IP65)
CE (Al, enameled, screw cap, IP68)
BSP (plastic, black, screw cap, IP54)
BRF (stainless steel, screw cap, M20x1,5, IP67)
BRF-EEX (stainless steel, screw cap, M20x1,5, IP67)
B-SRF (sanitary, stainless steel, screw cap, M20x1,5, IP67)
Other on request

Cable gland (pre-mounted in Head): -----
None (standard – cable entry M20x1.5)
Plastic
Nickle plated brass
Stainless acid-proof steel

Please specify cable diameter: -----

ELECTRICAL SPECIFICATIONS

---Plug (pre-mounted in Head):
M12 (for M20)
Harting (specify type)
Other on request
None

---Cable (pre-mounted in Head):
PP (Plastic-Plastic)
SS (Silicone-Silicone) max. 180°C
SBS (Silicone-Inner Braided-Silicone)
TBT (Teflon-Inner Braided-Teflon)
None

---Cable length [m]:

---Sensor Type:
Type K (NiCr-Ni) max. +1150°C
Type J (Fe-CuNi) max. +700°C
Type N (NiCrSi-Ni) max. +1250°C
Type E (NiCr-CuNi) max. +800°C
Type T (Cu-CuNi) max. +300°C
Other on request

---Number of thermocouples:
1xTC
2xTC
Other on request

---Media temperature max:
+600°C
+800°C
+1150°C

---Tolerance in acc. with DIN 43732:
Class 1 for K,J,N,E (i.e. ±1,5°C or ±(0,0040xT)
Class 2 for K,J,N,E (i.e. ±2,5°C or ±(0,0075xT)
Class 1 for T (i.e. ±0,5°C or ±(0,0040xT)
Class 2 for T (i.e. ±1,5°C or ±(0,0075xT)

Link for further information: [TC Tolerance](#)

THERMOCOUPLE THERMOMETER
Measuring insert: Fixed

Type:
TC-BUI

Sheet No.
3-4 V2.1
5351-E010721V3.1



Calibration:

Temperature calibration are used to verify and certify the sensor to have the correct accuracy. We can do either: "In house" or "Accredited" calibration. Accredited is certified by 3.e part. Normally we do a calibration in 3 points.

Enhanced performance services:


Cold applications (below -50°C) will influence the material and the measurement. CRYO treatment is needed to ensure a correct and working sensor down to -196°C.

A sensor will always drift over time, especially when there are high temperature fluctuations.

With "Ageing treatment" we stabilize the sensor to ensure a minimum drift over time. The benefits are long term stability, more correct measurement and easier planning of calibration periods.

Documentation:

Please order the correct documentation when ordering the sensor.

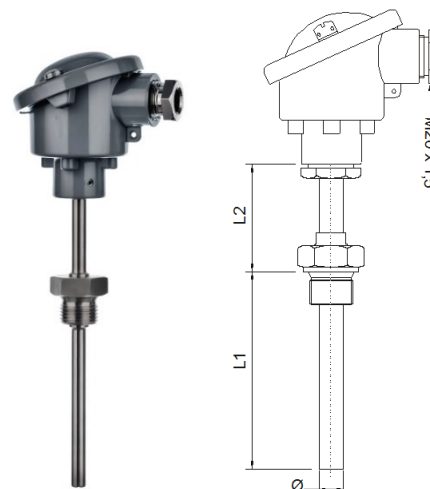

SIGNAL PROCESSING

Ceramic socket mounted in terminal head. -----

Prepared for transmitter w/o ceramic socket. -----
w/long leads

Programmable head mounted transmitter. -----

Measuring range min/max: -200/+850°C

Output: 2-wire, 4-20 mA

Min. span: 25°C

Ambient temperature min/max: -40/+85°C

[5334A Uninsulated for RTD](#)

[5334D EEX Uninsulated for RTD](#)

[5331A Galvanic Isolated RTD / TC](#)

[5331D EEX Galvanic Isolated RTD / TC](#)

[5335A Hart 5 Protocol Standard](#)

[5335D Hart 5 Protocol CSA, FM, ATEX, IECEx](#)

[5337A Hart 5 & 7 Protocol](#)

[5337D Hart 5 & 7 Protocol CSA, FM, ATEX, IECEx](#)



Transmitter Type:			
4 mA =	C°	20 mA =	C°

Link to further information:

[Transmitter Overview](#)

[Programmable rail mounted transmitter](#)



CALIBRATION

---Calibration:

In house (Span)

Accredited – in laboratory

4.	Point	°C
5.	Point	°C
6.	Point	°C

Enhanced performance services

-----Cryo treatment.

For temperature sensor under -50°C

-----Ageing:

For long term stability.

-----Documentation

Certificate: 3.1 Material
Certificate of origin
Certificate of conformity
Certificate of GOST

-----Marine Certificate

Certificate of DNV.GL
Certificate of BV
Certificate of Rina
Certificate of ClassNK
Certificate of LR
Certificate of ABS

Other on request