

THERMOCOUPLE THERMOMETER

Measuring insert: Fixed

Type:
TC-AM/AMC

Sheet No.
3-8 V2.1

5150-E010721V3.1




Application:

- Measurement of high temperatures in large ovens and channels for flue gases and air
- Field of application: Up to 1700°C (depending on thermocouple)
- Usually applied in: Tile works, refuse disposal plants and processing plants

Properties:

- Thermocouple thermometer type K, J, E, N, R, S or B in accordance with DIN IEC 60584-1
- Constructed in accordance with DS/EN 50446:2006
- Measuring insert: Interchangeable
- Process attachment: Adjustable flange or coupling
- Gas-proof ceramic internal tube protects thermocouple against pollution
- Outer protective sheath: Heat-proof steel
- Modular construction and standard length minimizes the number of spare parts
- Can be delivered with head mounted transmitter
- Approved by: GOST and TRCU (on request)

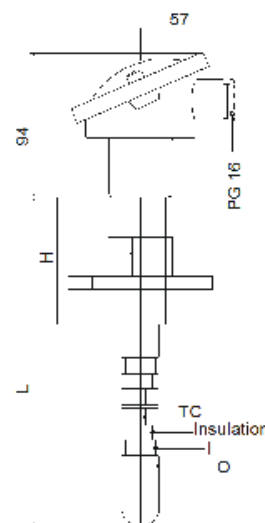

MECHANICAL SPECIFICATIONS

Protective tube O: -----

Heat-proof steel 4C54, according to DIN 50446 Special.

Internal tube according to DIN 50446: -----

Ceramics KER610
Ceramics KER799
None

Sensor diameter [mm]: -----

Ø22
Ø26

Nominal length [mm]: -----

500 / 710 / 1000 / 1400
Special

Process attachment: -----

1" BSP Adjustable nipple
Flange according to DIN 50446

Protection head: -----

A (aluminum, enameled, low cap, IP62)
A special (aluminum, enameled, low cap, IP65)
AHSH (aluminum, enameled, high cap, IP54)
Other on request

Cable gland (pre-mounted in Head): -----

Plastic
Nickel plated brass
Stainless acid-proof steel
None

Please specify cable diameter: -----

ELECTRICAL SPECIFICATIONS

---Plug (pre-mounted in Head):

M12 (for M20)
Harting (specify type)
Other on request
None

---Cable (pre-mounted in Head):

PP (Plastic-Plastic)
SBS (Silicone-Inner Braided-Silicone)
TBT (Teflon-Inner Braided-Teflon)
Other on request
None

---Cable length [m]:

---Sensor type:

Type T (Cu-CuNi) max. +300°C
Type J (Fe-CuNi) max. +700°C
Type E (NiCr-CuNi) max. +800°C
Type K (NiCr-Ni) max. +1150°C
Type N (NiCrSi-Ni) max. +1250°C
Type S (Pt10Rh-Pt) max +1600°C
Type R (Pt13Rh-Pt) max +1600°C
Type B (Pt30Rh-Pt6Rh) max +1700°C
Others on request

---Number of thermocouples:

1xTC
2xTC
Others on request

---Tolerance in acc. with IEC 60584-1:

Class 1 for T (i.e. $\pm 0,5^{\circ}\text{C}$ or $\pm(0,0040 \times T)$)
Class 1 for J, E, K, N (i.e. $\pm 1,5^{\circ}\text{C}$ or $\pm(0,0040 \times T)$)
Class 1 for S, R ($\pm 1,0^{\circ}\text{C}$ [$\pm 1,0^{\circ}\text{C} + (T(\text{actual}) - 1100^{\circ}\text{C})^{\circ}\text{C}$])
Class 2 for T (i.e. $\pm 1,5^{\circ}\text{C}$ or $\pm(0,0075 \times T)$)
Class 2 for J, E, K, N (i.e. $\pm 2,5^{\circ}\text{C}$ or $\pm(0,0075 \times T)$)
Class 2 for S (i.e. $\pm 1,25^{\circ}\text{C}$ or $\pm(0,0025 \times T)$)
Class 2 for R, B (i.e. $\pm 1,5^{\circ}\text{C}$ or $\pm(0,0025 \times T)$)

Link for further information: [TC Tolerance](#)

Date:

Part No.

Kjaerulf Pedersen a/s, Taastrupgaardsvej 8-10, DK-2630 Taastrup, Tel.: +45 39760203, Fax: +45 39760501, sensor@kp-as.com, www.kp-as.com

This is provided to you as a service and for information purpose only. While we have attempted to maintain the information as accurately as possible, the page may contain errors or omissions for which we disclaim any and all liability.

THERMOCOUPLE THERMOMETER
Measuring insert: Interchangeable

Type:
TC-AM/AMC

Sheet No.
3-8 V2.1
5150-E010721V3.1



Calibration:

Temperature calibration are used to verify and certify the sensor to have the correct accuracy. We can do either: "In house" or "Accredited" calibration. Accredited is certified by 3.e part. Normally we do a calibration in 3 points.

Enhanced performance services:


Cold applications (below -50°C) will influence the material and the measurement. CRYO treatment is needed to ensure a correct and working sensor down to -196°C.

A sensor will always drift over time, especially when there are high temperature fluctuations.

With "Ageing treatment" we stabilize the sensor to ensure a minimum drift over time. The benefits are long term stability, more correct measurement and easier planning of calibration periods.

Documentation:

Please order the correct documentation when ordering the sensor.

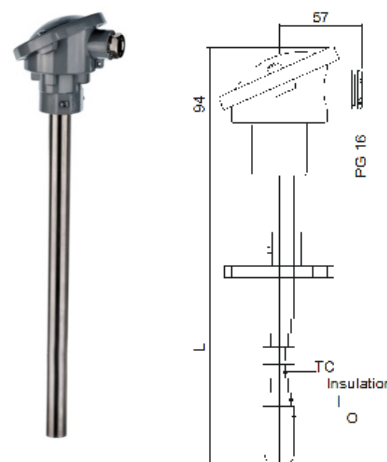

SIGNAL PROCESSING

Head mounted transmitter

Ceramic socket mounted in terminal head. ----- ☐

Prepared for transmitter w/o ceramic socket. ----- ☐

Programmable head mounted transmitter. ----- ☐

Measuring range min/max: -200/+850°C

Output: 2-wire, 4-20 mA

Min. span: 25°C

Ambient temperature min/max: -40/+85°C

[5334A Uninsulated for TC](#)

[5334D EEX Uninsulated for TC](#)

[5331A Galvanic Isolated RTD / TC](#)

[5331D EEX Galvanic Isolated RTD / TC](#)

[5335A Hart 5 Protocol Standard](#)

[5335D Hart 5 Protocol CSA, FM, ATEX, IECEx](#)

[5337A Hart 5 & 7 Protocol](#)

[5337D Hart 5 & 7 Protocol CSA, FM, ATEX, IECEx](#)



Transmitter Type:	
4 mA = C°	20 mA = C°

Link to further information:

[Transmitter Overview](#)

[Programmable rail mounted transmitter](#)



CALIBRATION

None

Calibration:

In house (Span)
Accredited – in laboratory

1. Point	°C
2. Point	°C
3. Point	°C

Enhanced performance services



Cryo treatment.

For temperature sensor under -50°C



Ageing:

For long term stability.



Documentation

Certificate: 3.1 Material
Certificate of origin
Certificate of conformity
Certificate of GOST

Date:

Part No.