

TEMPERATURE TRANSMITTER

Type: Ex for zone 0, 1 or 2, EEx ia IIC
 T1...T6, programmable
 Input: TC, mV

Type:
TT-5334B

Sheet No.
 6-7 V2.1

10122-E010818V2.1

**Application:**

- Linearized temperature measurement with TC sensor.
- Amplification of bipolar mV signals to a 4...20 mA signal.
- Optionally linearized according to a defined linearization function.

Properties:

- High measurement accuracy
- Programmable sensor error value
- Can be programmed within a few seconds by 2-way configuration (Windows), to measure temperatures within all RTD ranges defined by the norms
- TAG No: 15 character configurable
- Degree of protection (case/clamp): IP68 / IP00
- Measurements: Ø44 x 20.2mm
- Mounting/ installation: can be mounted in DIN form B sensor head or on DIN track with special clamp

**TECHNICAL DATA:****INPUT:**

Type	Min temp.	Max temp.	Min span	Norm
B	+400°C	+1820°C	200°C	IEC584
E	-100°C	+1000°C	50°C	IEC584
J	-100°C	+1200°C	50°C	IEC584
K	-180°C	+1372°C	50°C	IEC584
L	-100°C	+900°C	50°C	DIN43710
N	-180°C	+1300°C	100°C	IEC584
R	-50°C	+1760°C	200°C	IEC584
S	-50°C	+1760°C	200°C	IEC584
T	-200°C	+400°C	50°C	IEC584
U	-200°C	+600°C	75°C	DIN4370
W3	0°C	+2300°C	200°C	ASTM E988-90
W5	0°C	+2300°C	200°C	ASTM E988-90

COMMUNICATION INTERFACE:

Loop link 5905

MECHANICAL DATA:

Measurements: Ø 44 x 20,2 mm
 Degree of protection (case/clamp): IP68/ IP100

ENVIROMENTAL CONDITIONS:

Operating temperature: -40°C to +85°C
 Humidity: < 95% RH (non-cond.)

TECHNICAL DATA:**OUTPUT:**

Signal range: 4 - 20 mA

ACCURACY:

Type:	Basic accuracy:	Temperature coefficient:
Volt	≤±10µV	≤±1µV / °C
TC Type: E, J, K, L, N, T, UB	≤±1°C	≤±0,05°C/°C
TC Type: B, R, S, W3, W5E	≤±2°C	≤±0,2°C/°C

COMMON SPECIFICATIONS:

Supply voltage: DC: 7,2...35 V
 Voltage drop: 7,2 VDC
 Reaction time (programmable): 0,33...60 s

SENSOR TROUBLE SHOOTING:

Programmable: 3.5...23 mA
 NAMUR NE43 Upscale: 23 mA
 NAMUR NE43 Downscale: 3,5 mA

Ordering details: Please state if the transmitter should be programmed

Transmitter Input Type:			
4 mA =	C°	20 mA =	C°



2-wire programmable transmitter

5334B

- TC input
- High measurement accuracy
- Galvanic isolation
- Programmable sensor error value
- For DIN form B sensor head mounting



Application

- Linearized temperature measurement with TC sensor.
- Amplification of bipolar mV signals to a 4...20 mA signal, optionally linearized according to a defined linearization function.


Technical characteristics

- Within a few seconds the user can program PR5334B to measure temperatures within all TC ranges defined by the norms.
- Cold junction compensation (CJC) with a built-in temperature sensor.
- Continuous check of vital stored data for safety reasons.

Mounting / installation

- For DIN form B sensor head mounting.
- NB: As Ex barrier we recommend 5104B, 5114B, or 5116B.

Applications

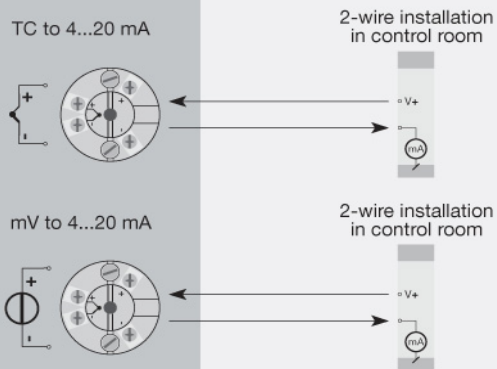

Order:

Type	Ambient temperature	Galvanic isolation
5334B	-40°C...+85°C : 3	1500 VAC : B

Environmental Conditions

Operating temperature.....	-40°C to +85°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree (encl./terminal).....	IP68 / IP00

Mechanical specifications

Dimensions.....	Ø 44 x 20.2 mm
Weight approx.....	50 g
Wire size.....	1 x 1.5 mm ² stranded wire
Screw terminal torque.....	0.4 Nm
Vibration.....	IEC 60068-2-6
2...25 Hz.....	±1.6 mm
25...100 Hz.....	±4 g

Common specifications**Supply**

Supply voltage.....	7.2...30 VDC
Internal power dissipation.....	25 mW...0.8 W

Isolation voltage

Isolation voltage, test / working.....	1.5 kVAC / 50 VAC
--	-------------------

Response time

Response time (programmable).....	1...60 s
Voltage drop.....	7.2 VDC
Warm-up time.....	5 min.
Programming.....	Loop Link
Signal / noise ratio.....	Min. 60 dB
EEPROM error check.....	< 3.5 s
Accuracy.....	Better than 0.05% of selected range
Signal dynamics, input.....	18 bit
Signal dynamics, output.....	16 bit
Effect of supply voltage change.....	< 0.005% of span / VDC
EMC immunity influence.....	< ±0.5% of span
Extended EMC immunity: NAMUR NE21, A criterion, burst.....	< ±1% of span

Input specifications**Common input specifications**

Max. offset.....	50% of selected max. value
------------------	----------------------------

TC input

Thermocouple type.....	B, E, J, K, L, N, R, S, T, U, W3, W5, LR
Cold junction compensation (CJC).....	< ±1.0°C
Sensor error detection.....	Yes
Sensor error current: When detecting / else.....	Nom. 33 µA / 0 µA

Voltage input

Measurement range.....	-12...150 mV
Min. measurement range (span).....	5 mV
Input resistance.....	10 MΩ

Output specifications**Current output**

Signal range.....	4...20 mA
Min. signal range.....	16 mA
Load (@ current output).....	≤ (Vsupply - 7.2) / 0.023 [Ω]
Load stability.....	≤ 0.01% of span / 100 Ω
Sensor error indication.....	Programmable 3.5...23 mA
NAMUR NE43 Upscale/Downscale.....	23 mA / 3.5 mA

Common output specifications

Updating time.....	440 ms
of span.....	= of the presently selected range

Observed authority requirements

EMC.....	2014/30/EU
EAC.....	TR-CU 020/2011

Approvals

ATEX.....	KEMA 06ATEX0062X
IECEX.....	DEK 13.0035X
INMETRO.....	DEKRA 16.0013 X
EAC Ex.....	RU C-DK.GB08.V.00410
DNV-GL Marine.....	Stand. f. Certific. No. 2.4