

RESISTANCE THERMOMETER

Measuring insert: Fixed

Type:
RT-RTBC

5860-E230524V2.2




Application:

- For measuring temperatures in moveable parts such as bearings and axles
- For tasks that require easy and quick replacement of temperature sensors

Properties:

- Sensor Pt100 or Pt1000 in acc. with IEC 60751
- Measuring insert: Fixed
- Electrical connection: Cable type TBT (Teflon-Braid-Teflon)
- Process attachment: Bayonet coupling
- Outer protective sheath: Stainless acid-proof steel
- IP67
- Marine approved by: DNV LR, NK, RINA, ABS and BV

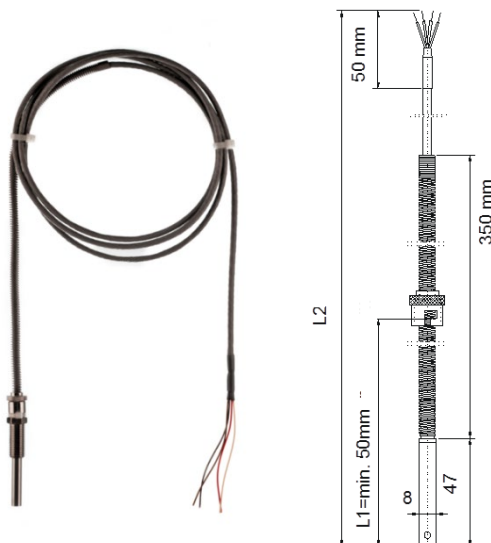

MECHANICAL SPECIFICATIONS:

Protective sheath: -----
EN 1.4571 (AISI3 16Ti), max. 850°C

Sensor diameter [mm]: -----
Ø8
Special

Nominal length L1 [mm]: -----
20 / 47
Special

Process attachment: -----
Bayonet coupling
Special

Sensor Bottom: -----
Steel
Silver (For quick reaction)

Connector: -----
1/4" BSP
Special

Connector length [mm]: -----
10 / 26 / 50

ELECTRICAL SPECIFICATIONS:

-----Sensor element:
1xPt100
2xPt100
1xPt1000

-----Number of conductors:
2-wire
3-wire
4-wire

-----Media temperatures max:
-50/+200°C
Special

-----Electrical connection:
Cable type TBT (Teflon-Braid-Teflon)
Special

-----Cable length:
3000 mm
Special

-----Tolerance in acc. with IEC 60751:
Type A DIN (i.e. $\pm(0,15+0,002 \times \text{Tactual})$ °C)
Type B 1/1 DIN (i.e. $\pm(0,3+0,005 \times \text{Tactual})$ °C)
Type B 1/3 DIN (i.e. $\pm(0,1+0,0017 \times \text{Tactual})$ °C)
Type B 1/6 DIN (i.e. $\pm(0,05+0,00083 \times \text{Tactual})$ °C)
Type B 1/10 IN (i.e. $\pm(0,03+0,0005 \times \text{Tactual})$ °C)
Special

RESISTANCE THERMOMETER

Measuring insert: Fixed

Type:
RT-RTBC

5860-E230524V2.2



Calibration:

Temperature calibration are used to verify and certify the sensor to have the correct accuracy. We can do either: "In house" or "Accredited" calibration. Accredited is certified by 3.e part. Normally we do a calibration in 3 points.

Enhanced performance services:


Cold applications (below -50°C) will influence the material and the measurement. CRYO treatment is needed to ensure a correct and working sensor down to -196°C.

A sensor will always drift over time, especially when there are high temperature fluctuations.

With "Ageing treatment" we stabilize the sensor to ensure a minimum drift over time. The benefits are long term stability, more correct measurement and easier planning of calibration periods.

Documentation:

Please order the correct documentation when ordering the sensor.

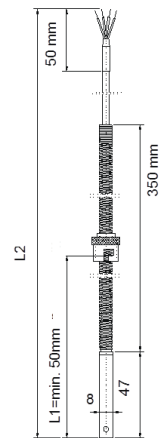

SIGNAL PROCESSING

Enclosure

Marine Box (112x82x42mm) -----

ABS Box (82x80x56mm) -----

NONE -----

Programmable mounted transmitter:

Measuring range min/max: -200/+850°C

Output: 2-wire, 4-20 mA

Min. span: 25°C

Ambient temperature min/max: -40/+85°C



[5333A Uninsulated for RTD](#)

[5333D EEX Uninsulated for RTD](#)

[5332A Uninsulated for RTD](#)

[5332D EEX Uninsulated for RTD](#)

[5331A Galvanic Isolated RTD / TC](#)

[5331D EEX Galvanic Isolated RTD / TC](#)

[5335A Hart 5 Protocol Standard](#)

[5335D Hart 5 Protocol CSA, FM, ATEX, IECEx](#)

[5337A Hart 5 & 7 Protocol](#)

[5337D Hart 5 & 7 Protocol CSA, FM, ATEX, IECEx](#)



Transmitter Type:			
4 mA =	C°	20 mA =	C°

[5350A Profibus standard](#)

[5350B Profibus ATEX, FM and CSA](#)

Link to further information:

[Transmitter Overview](#)

[Programmable rail mounted transmitter](#)

CALIBRATION

----Calibration:

In house (Span -33°C - +700°C)

Accredited – in laboratory (-196°C - +1200°C)

1.	Point	°C
2.	Point	°C
3.	Point	°C

More point on request

Enhanced performance services

-----Cryo treatment.

For temperature sensor under -50°C

-----Ageing:

For long term stability.

Secure minimum drift of sensor accuracy

-----Documentation

Certificate: 3.1 Material

Certificate of origin

Certificate of conformity

-----Marine Certificate

Certificate of DNV

Certificate of BV

Certificate of Rina

Certificate of ClassNK

Certificate of LR

Certificate of ABS

Other on request