

**RESISTANCE THERMOMETER**  
Measuring insert: Interchangeable

**Type: RT-AW**

Sheet No.  
2-30 V2.1

5450-E010321V3.1




**Application:**

- For measuring temperatures in the food, pharmaceutical, cosmetic and chemical/ technical industries

**Properties:**

- Sensor: Pt100, 2xPt100, Pt1000 in acc. with IEC 60751
- Mechanical and thermal stress in acc. with DIN 43772
- Measuring insert: Interchangeable
- Process attachment: Weld-in thermowell
- Outer protective sheath: Stainless acid-proof steel
- Withstands media temperatures of up to max. 250°C
- Withstands ambient temperatures of up to max. 120°C
- Withstands vibrations
- Quick reaction time
- Degree of protection is determined by the electrical connection; in this case protection head
- Following attachment of the sensor, the protection head can be turned to point in the desired direction
- Can be delivered with head mounted transmitter

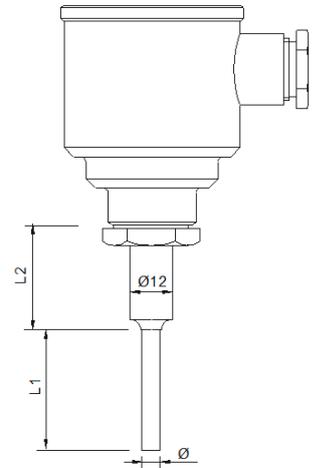

**MECHANICAL SPECIFICATIONS**

**Protective sheath:** -----   
EN 1.4404 (AISI 316L) max. 850°C

**Sensor diameter Ø [mm]:** -----   
Ø5 / Ø6 / Ø8  
Other on request

**Extension length L2 [mm]:** -----   
30 / 50  
Other on request

**Immersion length L1 [mm]:** -----   
20 / 35 / 50  
Other on request

**Surface area of parts with media contact:** -----   
Mechanically polished <0,8 µm  
Electro-polished <0,5 µm

**Protection head:** -----   
**B (aluminium (Al), enamelled, low cap, IP62)**  
BH (Al, enamelled, high cap, IP62)  
BSB (Al, tilting lid w/screw, low cap, IP65)  
BSBH (Al, tilting lid w/screw, high cap, IP65)  
BSBH-W (Al, tilting lid, high cap, digital display (excl. tr.), IP65)  
CE (Al, enamelled, screw cap, IP68)  
BRF (stainless steel, screw cap, M20x1,5, IP67)  
BRF-EEX (stainless steel, screw cap, M20x1,5, IP67)  
B-SRF (sanitary, stainless steel, screw cap, M20x1,5, IP67)  
Other on request

**Cable gland (pre-mounted):** -----   
None (standard – cable entry M20x1.5)  
Plastic  
Nickle plated brass  
Stainless acid-proof steel

**Please specify cable diameter:** -----

**ELECTRICAL SPECIFICATIONS**

**Plug (pre-mounted In Head):**  
M12 (for M20)  
Harting (specify type)  
Other on request  
None

**Cable (pre-mounted in Head):**  
SS (Silicone-Silicone) max. 180°C  
SBS (Silicone-Inner Braided-Silicone)  
TBT (Teflon-Inner Braided-Teflon)  
None

**Cable length [m]:**

**Sensor element:**  
1xPt100  
2xPt100  
1xPt1000 (only cl. B 1/1 and cl. A)  
2xPt1000 (only cl. B 1/1 and cl. A)

**Number of conductors:**  
2-wire (recommended only for Pt1000)  
3-wire  
4-wire

**Media temperature max:**  
+180°C  
+250°C

**Tolerance in acc. with IEC 60751:**  
Type A DIN (i.e.±(0,15+0,002xTactual) °C)  
Type B 1/1 DIN (i.e.±(0,3+0,005xTactual) °C)  
Type B 1/3 DIN (i.e.±(0,1+0,0017xTactual) °C)  
Type B 1/6 DIN (i.e.±(0,05+0,00083xTactual) °C)  
Type B 1/10 DIN (i.e.±(0,03+0,0005xTactual) °C)

Link for further information: [Pt100 Tolerance](#)

Date:

Part No.

**RESISTANCE THERMOMETER**  
Measuring insert: Interchangeable

**Type: RT-AW**

Sheet No.  
2-30 V2.1

5450- E010321V3.1



**Calibration:**

Temperature calibration are used to verify and certify the sensor to have the correct accuracy. We can do either: "In house" or "Accredited" calibration. Accredited is certified by 3.e part. Normally we do a calibration in 3 points.

**Enhanced performance services:**


Cold applications (below -50°C) will influence the material and the measurement. CRYO treatment is needed to ensure a correct and working sensor down to -196°C.

A sensor will always drift over time, especially when there are high temperature fluctuations.

With "Ageing treatment" we stabilize the sensor to ensure a minimum drift over time. The benefits are long term stability, more correct measurement and easier planning of calibration periods.

**Documentation:**

Please order the correct documentation when ordering the sensor.

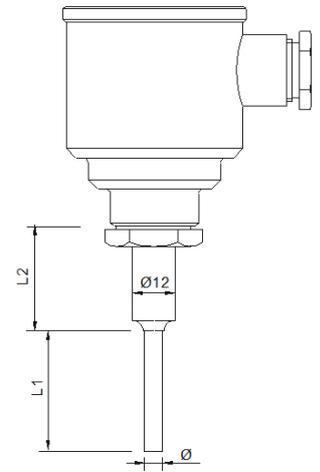

**SIGNAL PROCESSING**

Ceramic socket mounted in terminal head.

Prepared for transmitter w/o ceramic socket.  w/long leads

Programmable head mounted transmitter

Measuring range min/max: -200/+850°C  
Output: 2-wire, 4-20 mA  
Min. span: 25°C  
Ambient temperature min/max: -40/+85°C

- [5333A Uninsulated for RTD](#)
- [5333D EEX Uninsulated for RTD](#)
- [5332A Uninsulated for RTD](#)
- [5332D EEX Uninsulated for RTD](#)
- [5331A Galvanic Isolated RTD / TC](#)
- [5331D EEX Galvanic Isolated RTD / TC](#)
- [5335A Hart 5 Protocol Standard](#)
- [5335D Hart 5 Protocol CSA, FM, ATEX, IECEx](#)
- [5337A Hart 5 & 7 Protocol](#)
- [5337D Hart 5 & 7 Protocol CSA, FM, ATEX, IECEx](#)



|                                |                                 |
|--------------------------------|---------------------------------|
| Transmitter Type:              | <input type="text"/>            |
| 4 mA = <input type="text"/> C° | 20 mA = <input type="text"/> C° |

Link to further information:

[Transmitter Overview](#)

[Programmable rail mounted transmitter](#)



**CALIBRATION**

None

**Calibration:**

In house (Span -33°C - +700°C)

Accredited – in laboratory (-196°C - +1200°C)

|          |                      |    |
|----------|----------------------|----|
| 1. Point | <input type="text"/> | °C |
| 2. Point | <input type="text"/> | °C |
| 3. Point | <input type="text"/> | °C |

More point on request

**Enhanced performance services**

**Cryo treatment.**

For temperature sensor under -50°C

**Ageing:**

For long term stability.  
Secure minimum drift of sensor accuracy

**Documentation**

Certificate: 3.1 Material  
Certificate of origin  
Certificate of conformity

Date:

Part No.