

TEMPERATURE TRANSMITTER

Type: HART 5 protocol or HART 7 protocol
Input: RTD, TC, Ohm, mV

Type:
TT-5337A

Sheet No.
6-2 V2.1

10122-E010818V2.1



Application

- Linearized temperature measurement with TC and RTD sensors e.g. Pt100 and Ni100.
- HART communication and 4...20 mA analog PV output for individual, difference or average temperature measurement of up to two RTD or TC input sensors.
- Conversion of linear resistance to a standard analog current signal, e.g. from valves or Ohmic level sensors.
- Amplification of bipolar mV signals to standard 4...20 mA current signals.
- Up to 63 transmitters (HART 7) can be connected in a multidrop communication setup.

Technical characteristics

- HART protocol revision can be changed by user configuration to either HART 5 or HART 7 protocol.
The HART 7 protocol offers: · Long Tag numbers of up to 32 characters. · Enhanced Burst Mode and Event notification with time stamping. Device variable and status mapping to any dynamic variable PV, SV, TV or QV. Process signal trend measurement with logs and summary data. · Automatic event notification with time stamps. Command aggregation for higher communication efficiency.
- 5337A is designed according to strict safety requirements and is therefore suitable for applications in SIL installations.
- Continuous check of vital stored data.
- Meeting the NAMUR NE21 recommendations, the 5337 HART transmitter ensures top measurement performance in harsh EMC environments.
- Additionally, the 5337 meets NAMUR NE43 and NE89 recommendations.



TECHNICAL DATA:

INPUT:

Type	Min temp.	Max temp.	Min span	Norm
Pt100	-200°C	+850°C	25°C	DIN IEC 751
Ni100	-60°C	+250°C	25°C	
Lin. R	0Ω	10000ohm	30ohm	
B	+400°C	+1820°C	200°C	IEC584
E	-100°C	+1000°C	50°C	IEC584
J	-100°C	+1200°C	50°C	IEC584
K	-180°C	+1372°C	50°C	IEC584
L	-100°C	+900°C	50°C	DIN43710
N	-180°C	+1300°C	100°C	IEC584
R	-50°C	+1760°C	200°C	IEC584
S	-50°C	+1760°C	200°C	IEC584
T	-200°C	+400°C	50°C	IEC584
U	-200°C	+600°C	75°C	DIN4370
W3	0°C	+2300°C	200°C	ASTM E988-90
W5	0°C	+2300°C	200°C	ASTM E988-90

COMMUNICATION INTERFACE:

Loop link 5905

MECHANICAL DATA:

Measurements: Ø 44 x 20,2 mm
Degree of protection (case/clamp): IP68/ IP100

ENVIRONMENTAL CONDITIONS:

Operating temperature: -40°C to +85°C
Humidity: < 95% RH (non-cond.)

TECHNICAL DATA:

OUTPUT:

Signal range: 4 - 20 mA

ACCURACY:

Type:	Basic accuracy:	Temperature coefficient:
RTD	≤±0,2°C	≤±0,01°C/°C
LIN R	≤±0,1ohm	≤±10mohm/°C
Volt	≤±10µV	≤±1µV /°C
TC Type: E, J, K, L, N, T, UB	≤±1°C	≤±0,05°C/°C
TC Type: B, R, S, W3, W5E	≤±2°C	≤±0,2°C/°C

COMMON SPECIFICATIONS:

Supply voltage: DC: 7,2...35 V

Voltage drop: 7,2 VDC

Reaction time (programmable): 0,33...60 s

SENSOR TROUBLE SHOOTING:

Programmable: 3,5...23 mA

NAMUR NE43 Upscale: 23 mA

NAMUR NE43 Downscale: 3,5 mA

Ordering details: Please state if the transmitter should be programmed

Transmitter Input Type:			
4 mA =	C°	20 mA =	C°



2-wire transmitter with HART protocol

5337A

- RTD, TC, Ohm, and bipolar mV input
- 2 analog inputs and 5 device variables with status available
- HART protocol revision selectable from HART 5 or HART 7
- Hardware assessed for use in SIL applications
- Mounting in Safe area or Zone 2/22



Application

- Linearized temperature measurement with TC and RTD sensors e.g. Pt100 and Ni100.
- HART communication and 4...20 mA analog PV output for individual, difference or average temperature measurement of up to two RTD or TC input sensors.
- Conversion of linear resistance to a standard analog current signal, e.g from valves or Ohmic level sensors.
- Amplification of bipolar mV signals to standard 4...20 mA current signals.
- Up to 63 transmitters (HART 7) can be connected in a multidrop communication setup.


Technical characteristics

- HART protocol revision can be changed by user configuration to either HART 5 or HART 7 protocol.
- The HART 7 protocol offers:
 - Long Tag numbers of up to 32 characters.
 - Enhanced Burst Mode and Event notification with time stamping.
 - Device variable and status mapping to any dynamic variable PV, SV, TV or QV.
 - Process signal trend measurement with logs and summary data.
 - Automatic event notification with time stamps.
 - Command aggregation for higher communication efficiency.
- 5337A is designed according to strict safety requirements and is therefore suitable for applications in SIL installations.
- Continuous check of vital stored data.
- Meeting the NAMUR NE21 recommendations, the 5337 HART transmitter ensures top measurement performance in harsh EMC environments. Additionally, the 5337 meets NAMUR NE43 and NE89 recommendations.

Mounting / installation

- For DIN form B sensor head or DIN rail mounting via the PR fitting type 8421.
- Configuration via standard HART communication interfaces or by PR 5909 Loop Link.

Applications

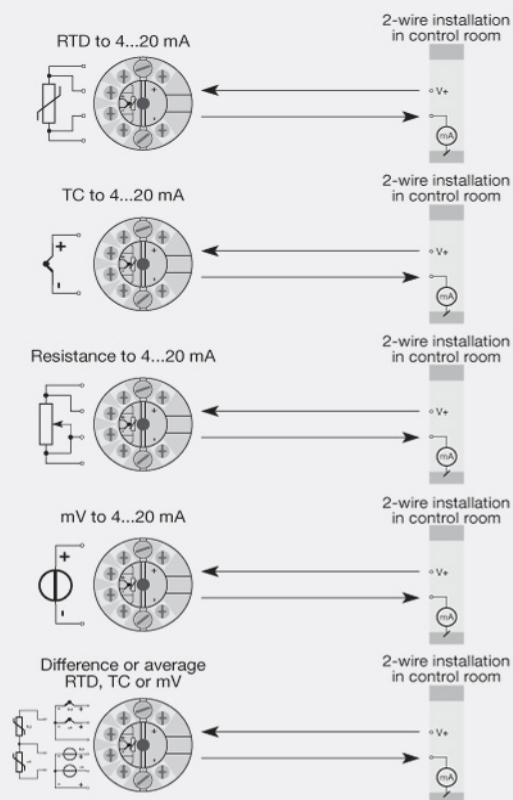

Order:

Type
5337A

Environmental Conditions

Operating temperature.....	-40°C to +85°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree (encl./terminal).....	IP68 / IP00

Mechanical specifications

Dimensions.....	Ø 44 x 20.2 mm
Weight approx.....	50 g
Wire size.....	1 x 1.5 mm ² stranded wire
Screw terminal torque.....	0.4 Nm
Vibration.....	IEC 60068-2-6
2...25 Hz.....	±1.6 mm
25...100 Hz.....	±4 g

Common specifications**Supply**

Supply voltage.....	8.0...35 VDC
---------------------	--------------

Isolation voltage

Isolation voltage, test / working.....	1.5 kVAC / 50 VAC
--	-------------------

Response time

Response time (programmable).....	1...60 s
Voltage drop.....	8.0 VDC
Signal / noise ratio.....	> 60 dB
Programming.....	Loop Link & HART
Accuracy.....	Better than 0.05% of selected range
Signal dynamics, input.....	22 bit
Signal dynamics, output.....	16 bit
EMC immunity influence.....	< ±0.1% of span
Extended EMC immunity: NAMUR NE21, A criterion, burst.....	< ±1% of span

Input specifications**Common input specifications**

Max. offset.....	50% of selected max. value
------------------	----------------------------

RTD input

RTD type.....	Pt50/100/200/500/1000; Ni50/100/120/1000
Cable resistance per wire.....	5 Ω (up to 50 Ω per wire is possible with reduced measurement accuracy)
Sensor current.....	Nom. 0.2 mA

TC input

Thermocouple type.....	B, E, J, K, L, N, R, S, T, U, W3, W5, LR
Cold junction compensation (CJC).....	Constant, internal or external via a Pt100 or Ni100 sensor

Voltage input

Measurement range.....	-800...+800 mV
Min. measurement range (span).....	2.5 mV
Input resistance.....	10 MΩ

Output specifications**Current output**

Signal range.....	4...20 mA
Min. signal range.....	16 mA
Load (@ current output).....	≤ (Vsupply - 8) / 0.023 [Ω]
Sensor error indication.....	Programmable 3.5...23 mA
NAMUR NE43 Upscale/Downscale.....	23 mA / 3.5 mA

Common output specifications

Updating time.....	440 ms
HART protocol revisions.....	HART 7 and HART 5

Observed authority requirements

EMC.....	2014/30/EU
EAC.....	TR-CU 020/2011

Approvals

ATEX 2014/34/EU.....	KEMA 03ATEX1508 X
IECEx.....	KEM 10.0083X
INMETRO.....	NCC 12.0844 X
DNV-GL Marine.....	Stand. f. Certific. No. 2.4
SIL.....	Hardware assessed for use in SIL applications